
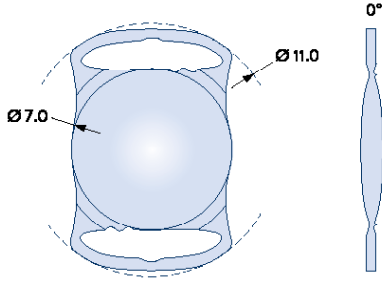


## ASPIRA-aXA

TECHNICAL INFORMATION	
MONOFOCAL MONOBLOC ACRYLIC ASPHERIC  	<p><b>ASPIRA-aXA</b></p> 
Type	foldable posterior chamber IOL one-piece, plate with cut-out haptics also available in preloaded Safeloader® autoloading container; deviating diopter range <span style="border: 1px solid black; padding: 2px;">SL</span>
Material	hydrophilic acrylic with UV-absorber; water content 26% at 35°C
Specifics	aspheric anterior surface (aberration free) <sup>(1)</sup> , posterior surface with 360° lens epithelial cell barrier
Diopter Range	
Sphere in 0.5 D steps (optic shape)	10.0 to 30.0 D (biconvex)
Sphere in 1.0 D steps (optic shape)	-10.0 to 9.0 D (concave-convex)
Est. A-const	118.3 (optical biometry)

<sup>(1)</sup> The word „aberration“ as used in this document refers to „spherical aberration“